



Designed to empower.



Fronius Symo
GEN24 SC &
GEN24 SC Plus

Product advantages

- 01 Backup power for every situation
- 02 Built-in freedom
- 03 Versatility as standard
- 04 Sustainably future-proof
- 05 Maximum independence

Product advantages



01 Backup power for every situation

A reliable energy supply: the Fronius GEN24 offers just that with an integrated basic backup power function, the PV Point. With the Fronius GEN24 Plus, you can choose between the PV Point and the Full Backup option, which provides backup power for the entire home.

02 Built-in freedom

The Fronius GEN24 and Fronius GEN24 Plus have open interfaces. This makes it easy to integrate components from Fronius or third-party suppliers for a tailor-made photovoltaic system.

03 Versatility as standard

More functions. More control. More power. Thanks to their energy management functions, the Fronius GEN24 and Fronius GEN24 Plus continuously save time and money. What's more, the integrated active cooling extends the service life of the inverter, protecting your investment for many years to come.

04 Sustainably future-proof

For those who don't want to decide right away: Thanks to the Fronius UP.storage* software upgrade, your device can be retrofitted with the battery connection and therefore the Full Backup power supply at any time.

05 Maximum independence

By combining the Fronius GEN24 Plus with a battery, you can get even more out of your photovoltaic system, even at night. Use more of your own electricity and become more independent of electricity providers and prices.


* Available in the Fronius webshop in selected countries.

Impressive power data






The Fronius GEN24 and GEN24 Plus impress with premium efficiency and maximum power at high temperatures.



Efficiency

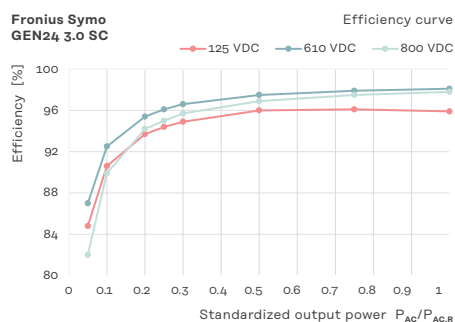

Power derating

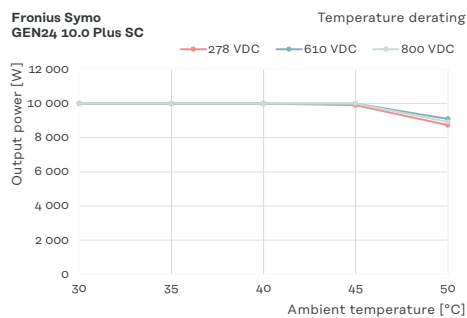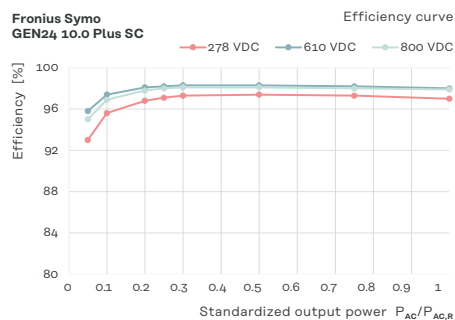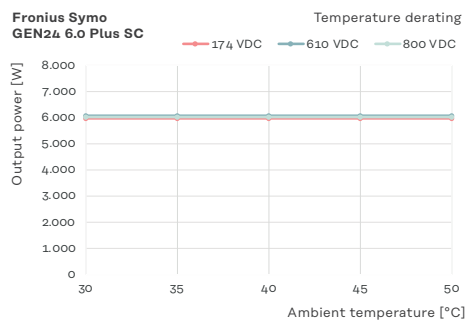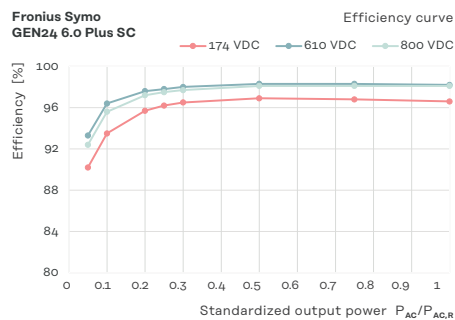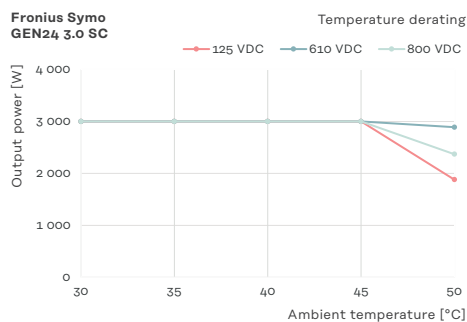

Technical data

3.0 / 4.0 / 5.0 kW

			Symo GEN24 SC / GEN24 Plus SC								
			3.0			4.0			5.0		
Input data	Number of MPP trackers		2			2			2		
	DC input voltage range ($U_{dc\ min} - U_{dc\ max}$)	V	80 - 1,000			80 - 1,000			80 - 1,000		
	Rated input voltage ($U_{dc,r}$)	V	610			610			610		
	Feed-in start-up input voltage ($U_{dc\ start}$)	V	80			80			80		
	Usable MPP voltage range	V	80 - 800			80 - 800			80 - 800		
	MPP voltage range (at rated power) ($U_{mpp\ min} - U_{mpp\ max}$)	V	115 - 800			150 - 800			190 - 800		
			MPPT1	MPPT2		MPPT1	MPPT2		MPPT1	MPPT2	
	Max. usable input current ($I_{dc\ max}$)	A	14			14			14		
	Max. array short circuit current ($I_{sc\ pv}$) ¹	A	20			20			20		
	Number of DC connections		2		1	2		1	2		1
			MPPT1	MPPT2	Total	MPPT1	MPPT2	Total	MPPT1	MPPT2	Total
	Max. usable DC power	W	3,150	3,150	3,150	4,180	4,180	4,180	5,200	5,200	5,200
	Max. PV generator output	W _{peak}	4,500	4,500	4,500	6,000	6,000	6,000	6,500	6,500	7,500

Output data	AC rated power ($P_{ac,r}$)	W	3,000		4,000		5,000	
	Apparent power	VA	3,000		4,000		5,000	
	Max. output power	VA	3,000		4,000		5,000	
			380 Vac	400 Vac	380 Vac	400 Vac	380 Vac	400 Vac
	Rated AC output current	A	4.5	4.3	6.1	5.8	7.6	7.2
	Grid connection ($U_{ac,r}$)	V	3~ NPE 400/230 or 3~ NPE 380/220 (+20%/-30%)					
	Frequency (frequency range $f_{min} - f_{max}$)	Hz	50/60 (45 - 65)					
	Total harmonic distortion	%	< 3.5		< 3.5		< 3.5	
	Power factor ($\cos \varphi_{ac,r}$)		0.7 - 1 ind. / cap.					

Output data PV Point	Rated output power PV Point	VA	3,000	3,000	3,000
	Grid connection PV Point	V	1~ NPE 220/230		
	Switching time	sec.	~15	~15	~15



Full Backup power and battery function only available with GEN24 Plus SC.

 Full Backup power and battery function only available with GEN24 Plus SC.			Symo GEN24 Plus SC		
			3.0	4.0	5.0
Output data Full Backup ²	Rated output power Full Backup	VA	The Full Backup power supply function is available for Symo GEN24 6.0-12.0 Plus SC.		
	Nominal Full Backup phase power	VA			
	Grid connection Full Backup	V			
	Switching time	sec.			

Battery connection	Number of DC inputs		1	1	1
	Max. input current (I _{dc max})	A	22	22	22
	DC input voltage range (U _{dc min} - U _{dc max})	V	160 - 700	160 - 700	160 - 700
	DC battery connection technology		1x BATT+ and 1x BATT- push-in spring terminals 2.5 - 10 mm²		
	Max. DC input/output power ³	W	3,300	4,300	5,300
	Max. charging power for AC coupling ³	W	3,000	4,000	5,000
	Compatible batteries ⁴		BYD Battery-Box Premium HVS/HVM ⁵ & LG FLEX		

¹ $I_{sc\ pv} = I_{sc\ max} \geq I_{sc} (STC) \times 1,25$ according to e.g. IEC 60364-7-712, NEC 2020, AS/NZS 5033:2021.

² Additional external components for grid switchover are required for the Full Backup. See the Operating Instructions for further details.

³ Depending on connected battery

⁴ Depending on the country-specific certification and availability

⁵ Excluding BYD Battery-Box Premium HVM 8.3

			Symo GEN24 SC / GEN24 Plus SC		
			3.0	4.0	5.0
General data	Dimensions (height × width × depth)	mm	530 x 474 x 165		
	Weight (inverter/with packaging)	kg	15,6 / 19,4	15,6 / 19,4	15,6 / 19,4
	Protection class		IP 66	IP 66	IP 66
	Safety class		1	1	1
	Night consumption	W	<10	<10	<10
	Overtoltage category (DC/AC) ⁶		2/3	2/3	2/3
	Cooling		Active Cooling technology		
	Installation		Indoor and outdoor installation		
	Ambient temperature range	°C	-25 to +60	-25 to +60	-25 to +60
	Permissible humidity	%	0 - 100	0 - 100	0 - 100
	Noise emissions	dB (A)	< 36	< 36	< 36
	Max. altitude above sea level	m	3,000/4,000 (unrestricted/restricted voltage range)		
	DC connection technology PV		3 × DC+ and 3 × DC- push-in spring terminals 2.5 - 10 mm ²		
	AC connection technology		5-pin AC push-in spring terminals 1.5 - 10 mm ² 3-pin backup power push-in spring terminals 1.5 - 10 mm ² 5 × PPE screw terminals 2.5 - 16 mm ²		
	Certificates and compliance with standards ⁷		IEC 62109, IEC 62116, IEC 61727, IEC 62909, VDE AR-N4105, AS/NZS 4777.2, EN 50549, CEI 0-21, G 98, R25		
Efficiency	Backup power functions ⁸		PV Point or Full Backup		
	Life cycle analysis		In accordance with ÖNORM EN ISO 14040 and 14044 (checked by employees from Fraunhofer IZM)		
Efficiency	Max. efficiency	%	98.1	98.1	98.1
	Euro. efficiency (η _{EU})	%	96.6	97.1	97.4
	MPP adaptation efficiency	%	> 99.9	> 99.9	> 99.9
Protection devices	DC isolation measurement		Integrated		
	DC disconnect		Integrated		
	Reverse polarity protection		Integrated		
Interfaces	WLAN/2 × Ethernet LAN		Fronius Solar.web, Modbus TCP SunSpec, Fronius Solar API (JSON)		
	6 digital inputs 6 digital inputs/outputs		Connection to ripple control receiver, energy management		
	Emergency shut-off (WSD)		Integrated		
	Datalogger and web server		Integrated		
	2 × RS485		Modbus RTU SunSpec (third-party provider)/Fronius Smart Meter, battery, Fronius Ohmpilot		

⁶ In line with IEC 62109-1. Option to retrofit surge protection device DC SPD type 1+2 for 2 MPP trackers available under the following item number: 4,240,313,CK

⁷ You can find the current certificates under www.fronius.com/symo-gen24-plus-cert

⁸ Full Backup power is only available with GEN24 Plus SC.

Technical data

6.0 / 8.0 / 10.0 kW

			Symo GEN24 SC / GEN24 Plus SC								
			6.0			8.0			10.0 AUS		
Input data	Number of MPP trackers		2			2			2		
	DC input voltage range ($U_{dc\ min} - U_{dc\ max}$)	V	80 - 1,000			80 - 1,000			80 - 1,000		
	Rated input voltage ($U_{dc,r}$)	V	610			610			610		
	Feed-in start-up input voltage ($U_{dc\ start}$)	V	80			80			80		
	Usable MPP voltage range	V	80 - 800			80 - 800			80 - 800		
	MPP voltage range (at rated power) ($U_{mpp\ min} - U_{mpp\ max}$)	V	148 - 800			197 - 800			246 - 800		
			MPPT1		MPPT2	MPPT1		MPPT2	MPPT1		MPPT2
	Max. usable input current ($I_{dc\ max}$)	A	28		14	28		14	28		14
	Max. array short circuit current ($I_{sc\ pv}$) ¹	A	40		20	40		20	40		20
	Number of DC connections		2		1	2		1	2		1
			MPPT1	MPPT2	Total	MPPT1	MPPT2	Total	MPPT1	MPPT2	Total
	Max. usable DC power	W	6,180	6,180	6,180	8,240	8,240	8,240	10,300	8,600	10,300
	Max. PV generator output	W _{peak}	7,500	7,500	9,000	10,000	8,500	12,000	12,500	9,000	15,000

Output data	AC rated power ($P_{ac,r}$)	W	6,000		8,000		9,999	
	Apparent power	VA	6,000		8,000		9,999	
	Max. output power	VA	6,000		8,000		9,999	
			380 Vac	400 Vac	380 Vac	400 Vac	380 Vac	400 Vac
	Rated AC output current	A	9.1	8.7	12.1	11.6	15.2	14.5
	Grid connection ($U_{ac,r}$)	V	3~ NPE 400/230 or 3~ NPE 380/220 (+20%/-30%)					
	Frequency (frequency range f_{min} - f_{max})	Hz	50/60 (45 - 65)					
	Total harmonic distortion	%	< 3.5		< 3.5		< 3.5	
	Power factor ($\cos \varphi_{ac,r}$)		0.7 - 1 ind. / cap.					

Output data PV Point	Rated output power PV Point	VA	3,000	3,000	3,000
	Grid connection PV Point	V	1~ NPE 220/230		
	Switching time	sec.	~15	~15	~15



Full Backup power and battery function only available with GEN24 Plus SC.

 Full Backup power and battery function only available with GEN24 Plus SC.			Symo GEN24 Plus SC		
			6.0	8.0	10.0 AUS
Output data Full Backup ²	Rated output power Full Backup	VA	6,000	8,000	9,999
	Nominal Full Backup phase power	VA	4,133	4,133	4,133
	Grid connection Full Backup	V	3~ NPE 400/230 or 3~ NPE 380/220		
	Switching time	sec.	~10	~10	~10

Battery connection	Number of DC inputs		1	1	1
	Max. input current ($I_{dc\ max}$)	A	22	22	22
	DC input voltage range ($U_{dc\ min} - U_{dc\ max}$)	V	160 - 700	160 - 700	160 - 700
	DC battery connection technology		1x BATT+ and 1x BATT- push-in spring terminals 2.5 - 10 mm²		
	Max. DC input/output power ³	W	6,180	8,240	10,300
	Max. charging power for AC coupling ³	W	6,000	8,000	9,999
	Compatible batteries ⁴		BYD Battery-Box Premium HVS/HVM ⁵ & LG FLEX		

¹ $I_{sc\ pv} = I_{sc\ max} \geq I_{sc} (STC) \times 1.25$ according to e.g. IEC 60364-7-712, NEC 2020, AS/NZS 5033:2021.

² Additional external components for grid switchover are required for the Full Backup. See the Operating Instructions for further details.

³ Depending on connected battery

⁴ Depending on the country-specific certification and availability

⁵ Excluding BYD Battery-Box Premium HVM 8.3

			Symo GEN24 SC / GEN24 Plus SC		
			6.0	8.0	10.0 AUS
General data	Dimensions (height × width × depth)	mm	595 × 529 × 180		
	Weight (inverter/with packaging)	kg	22,8 / 28,0	22,8 / 28,0	22,8 / 28,0
	Protection class		IP 66	IP 66	IP 66
	Safety class		1	1	1
	Night consumption	W	< 10	< 10	< 10
	Overvoltage category (DC/AC) ⁶		2/3	2/3	2/3
	Cooling		Active Cooling technology		
	Installation		Indoor and outdoor installation		
	Ambient temperature range	°C	-25 to +60	-25 to +60	-25 to +60
	Permissible humidity	%	0 - 100	0 - 100	0 - 100
	Noise emissions	dB (A)	< 47	< 47	< 47
	Max. altitude above sea level	m	3,000/4,000 (unrestricted/restricted voltage range)		
	DC connection technology PV		3 × DC+ and 3 × DC- push-in spring terminals 2.5 - 10 mm ²		
	AC connection technology		5-pin AC push-in spring terminals 1.5 - 10 mm ² 3-pin backup power push-in spring terminals 1.5 - 10 mm ² 5 × PPE screw terminals 2.5 - 16 mm ²		
	Certificates and compliance with standards ⁷		IEC 62109, IEC 62116, IEC 61727, IEC 62909, VDE AR-N4105, AS/NZS 4777.2, EN 50549, CEI 0-21, G 98, R25		
Efficiency	Backup power functions ⁸		PV Point or Full Backup		
	Life cycle analysis		In accordance with ÖNORM EN ISO 14040 and 14044 (checked by employees from Fraunhofer IZM)		
Efficiency	Max. efficiency	%	98.3	98.3	98.3
	Euro. efficiency (η _{EU})	%	97.9	98	98,1
	MPP adaptation efficiency	%	> 99.9	> 99.9	> 99.9
Protection devices	DC isolation measurement		Integrated		
	DC disconnect		Integrated		
	Reverse polarity protection		Integrated		
Interfaces	WLAN/2 × Ethernet LAN		Fronius Solar.web, Modbus TCP SunSpec, Fronius Solar API (JSON)		
	6 digital inputs 6 digital inputs/outputs		Connection to ripple control receiver, energy management		
	Emergency shut-off (WSD)		Integrated		
	Datalogger and web server		Integrated		
	2 × RS485		Modbus RTU SunSpec (third-party provider)/Fronius Smart Meter, battery, Fronius Ohmpilot		

⁶ In line with IEC 62109-1. Option to retrofit surge protection device DC SPD type 1+2 for 2 MPP trackers available under the following item number: 4,240,313,CK

⁷ You can find the current certificates under www.fronius.com/symo-gen24-plus-cert

⁸ Full Backup power is only available with GEN24 Plus SC.

Technical data

12.0 kW

			Symo GEN24 SC / GEN24 Plus SC		
			12.0		
Input data	Number of MPP trackers		2		
	DC input voltage range ($U_{dc\ min} - U_{dc\ max}$)	V	80 - 1,000		
	Rated input voltage ($U_{dc,r}$)	V	610		
	Feed-in start-up input voltage ($U_{dc\ start}$)	V	80		
	Usable MPP voltage range	V	80 - 800		
	MPP voltage range (at rated power) ($U_{mpp\ min} - U_{mpp\ max}$)	V	295 - 800		
			MPPT1		MPPT2
	Max. usable input current ($I_{dc\ max}$)	A	28		14
	Max. array short circuit current ($I_{sc\ pv}$) ¹	A	40		20
	Number of DC connections		2		1
			MPPT1	MPPT2	Total
	Max. usable DC power	W	12,360	8,600	12,360
	Max. PV generator output	W _{peak}	14,000	9,000	18,000

Output data	AC rated power ($P_{ac,r}$)	W	12,000		
	Apparent power	VA	12,000		
	Max. output power	VA	12,000		
			380 Vac		400 Vac
	Rated AC output current	A	18.2		17.4
	Grid connection ($U_{ac,r}$)	V	3~ NPE 400/230 or 3~ NPE 380/220 (+20%/-30%)		
	Frequency (frequency range $f_{min} - f_{max}$)	Hz	50/60 (45 - 65)		
	Total harmonic distortion	%	< 3.5		
	Power factor ($\cos \varphi_{ac,r}$)		0.7 - 1 ind. / cap.		

Output data PV Point	Rated output power PV Point	VA	3,000		
	Grid connection PV Point	V	1~ NPE 220/230		
	Switching time	sec.	~15		



Full Backup power and battery function only available with GEN24 Plus SC.

			Symo GEN24 Plus SC		
			12.0		
Output data Full Backup ²	Rated output power Full Backup	VA	12,000		
	Grid connection Full Backup	V	3~ NPE 400/230 or 3~ NPE 380/220		
	Switching time	sec.	~10		

Battery connection	Number of DC inputs		1		
	Max. input current ($I_{dc\ max}$)	A	22		
	DC input voltage range ($U_{dc\ min} - U_{dc\ max}$)	V	160 - 700		
	DC battery connection technology		1x BATT+ and 1x BATT- push-in spring terminals 2.5 - 10 mm ²		
	Max. DC input/output power ³	W	11,682		
	Max. charging power for AC coupling ³	W	11,682		
	Compatible batteries ⁴		BYD Battery-Box Premium HVS/HVM ⁵ & LG FLEX		

¹ $I_{sc\ pv} = I_{sc\ max} \geq I_{sc} (STC) \times 1,25$ according to e.g. IEC 60364-7-712, NEC 2020, AS/NZS 5033:2021.

² Additional external components for grid switchover are required for the Full Backup. See the Operating Instructions for further details.

³ Depending on connected battery

⁴ Depending on the country-specific certification and availability

⁵ Excluding BYD Battery-Box Premium HVM 8.3

			Symo GEN24 SC / GEN24 Plus SC
			12.0
General data	Dimensions (height × width × depth)	mm	595 × 529 × 180
	Weight (inverter/with packaging)	kg	22,8 / 28,0
	Protection class		IP 66
	Safety class		1
	Night consumption	W	<10
	Overvoltage category (DC/AC) ⁶		2/3
	Cooling		Active Cooling technology
	Installation		Indoor and outdoor installation
	Ambient temperature range	°C	-25 to +60
	Permissible humidity	%	0 - 100
	Noise emissions	dB (A)	< 47
	Max. altitude above sea level	m	3,000/4,000 (unrestricted/restricted voltage range)
	DC connection technology PV		3 × DC+ and 3 × DC- push-in spring terminals 2.5 - 10 mm ²
	AC connection technology		5-pin AC push-in spring terminals 1.5 - 10 mm ² 3-pin backup power push-in spring terminals 1.5 - 10 mm ² 5 × PPE screw terminals 2.5 - 16 mm ²
	Certificates and compliance with standards ⁷		IEC 62109, IEC 62116, IEC 61727, IEC 62909, VDE AR-N4105, AS/NZS 4777.2, EN 50549, CEI 0-21, G 98, R25
	Backup power functions ⁸		PV Point or Full Backup
	Life cycle analysis		In accordance with ÖNORM EN ISO 14040 and 14044 (checked by employees from Fraunhofer IZM)
Efficiency	Max. efficiency	%	98.2
	Euro. efficiency (η _{EU})	%	97.9
	MPP adaptation efficiency	%	> 99.9
Protection devices	DC isolation measurement		Integrated
	DC disconnect		Integrated
	Reverse polarity protection		Integrated
Interfaces	WLAN/2 × Ethernet LAN		Fronius Solar.web, Modbus TCP SunSpec, Fronius Solar API (JSON)
	6 digital inputs 6 digital inputs/outputs		Connection to ripple control receiver, energy management
	Emergency shut-off (WSD)		Integrated
	Datalogger and web server		Integrated
	2 × RS485		Modbus RTU SunSpec (third-party provider)/Fronius Smart Meter, battery, Fronius Ohmpilot

⁶ In line with IEC 62109-1. Option to retrofit surge protection device DC SPD type 1+2 for 2 MPP trackers available under the following item number: 4,240,313,CK

⁷ You can find the current certificates under www.fronius.com/symo-gen24-plus-cert

⁸ Full Backup power is only available with GEN24 Plus SC.



Offering proven quality with even more power for the private home

For further information, please visit
www.fronius.com/gen24-inverter

Fronius Australia Pty Ltd.
90-92 Lambeck Drive
Tullamarine VIC 3043
Australia
pv-sales-australia@fronius.com
www.fronius.com.au

Fronius International GmbH
Froniusplatz 1
4600 Wels
Austria
pv-sales@fronius.com
www.fronius.com

Text and illustrations were accurate at the time of printing. Fronius reserves the right to make changes. All information published in this document, despite exercising the greatest of care in its preparation, is subject to change; no legal liability is accepted. Copyright © 2024 Fronius™. All rights reserved.

AUS_ Voi1 Nov 2024